




GENERATOR MODEL: UC800

230/400V, 50HZ @ 1500RPM

Prime Power	800 kVA	640 kW
Standby Power	880 kVA	704 kW

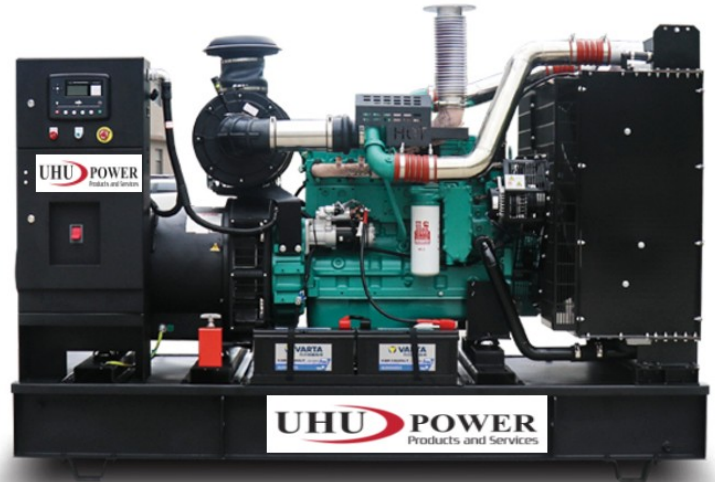

Features:

- **Warranty: 1 year or 1000 hours.**
- **Cummins as the world's leading power engines manufacturer since 1919.**
- **24/7 after sales support.**
- **Easy and economical availability of Spares.**
- **Advance digital control system, Long service life, Easy to Operate, Low Fuel consumption, Anti vibrating Isolators.**
- **Automatic start (optional), Eco-friendly.**
- **Low oil shutdown safety.**
- **Automatic overload protection safety.**



Engine

Cummins (China), Model KTA38-G2B, in accordance to ISO3046, ISO 8528, DIN 6271



Alternator

Stamford-UK, Leroy Somer-France, Meccalte-EU Complying to the following Standards: CEE/CE12/3/EN60034-1 / IEC34-1/VDE



Control Panel

Deep Sea Electronics DSE-4000/6000 series, Made in UK, Comply to standards: BS EN 61000, BS EN 60950, BS EN 60068



Fuel Tank

The overall fuel tank capacity: 1,000 LTR.



Dimensions

L x W x H = 14.6' x 6.7' x 7.5' (without Canopy)

ENGINE TECHNICAL DATA



SCHEMA



FUEL




LUBE SYSTEM



COOLING



AIR INTAKE



EXHAUST

Engine Make	Cummins
Engine Model	KTA38-G2B
Number Of Cylinders	12
Cylinder Arrangement	V-Type
Bore and Stroke	159 mm x 159 mm
Governor Type	Electronic
Displacement	37.8 L
Compression Ratio	14.5:1
Aspiration	Turbocharged, aftercooled
Cycle	4 Stroke
Combustion System	Direct Injection Cummins PT
Rotation	Anti-clockwise, viewed on flywheel
Cooling System	Water - Cooled
Frequency and Engine Speed	50Hz and 1500 rpm
Gross Engine Power (Prime)	711 kW / 953 h.p
Gross Engine Power (Standby)	789 kW / 1057 h.p
Fuel Consumption	
100% Load (L/hr)	171
75% Load (L/hr)	131
50% Load (L/hr)	93
Fuel Tank Capacity	1000 Ltr
Lubrication System Capacity	135.0 Ltr
Total Coolant Capacity	220.0 Ltr
Radiator Cooling Air Flow	19.1 m ³ /sec
Combustion Air Flow	55.2 m ³ /min
Exhaust Gas Flow (Prime)	135.1 m ³ /min
Exhaust Gas Flow (Standby)	144.5 m ³ /min
Exhaust Temperature (Prime)	470 °C
Exhaust Temperature (Standby)	477 °C



ALTERNATOR TECHNICAL DATA



SCHEMA

Insulation System	Class H
Winding Pitch	2/3 to Minimize Harmonics effects
Number of Poles	4
Number of Bearings	Single Bearing
RPM	1500 RPM
Power Factor	0.8/1
Regulation	± 1%
Frequency	50 Hz
Voltage Range	380-415 / 220-240
IP Rating (Protection)	Ip23

Synchronous, 3/1 phase, Brushless & Self Excited

NOTE: Alternator Brand & Model is subject to availability.



The New
STAMFORD
S-Range



20% Quicker
Assembly Time



9,000 Hours
of Testing



CONTROL MODULE

DEEP SEA ELECTRONICS
(DSE-4000/6000/7000 Series)



INDICATORS

- ✔ Operating Hours
- ✔ 3 Phase Generator Voltage Sensing & Monitoring
- ✔ Current Protection & Monitoring
- ✔ Power Measurement (kW, kVA, kVA_r, kWh, kVAh, kVA_rh, pf)
- ✔ Frequency Monitoring (Hz)
- ✔ Oil Pressure/Coolant Temperature
- ✔ Battery Voltage Monitoring (DC)
- ✔ Alarm Acknowledge



CONTROLS

- ✔ Engine Cool Down Timer
- ✔ Emergency Stop Push button/ Alarm Acknowledge
- ✔ Warm-up Timer
- ✔ Load Switching Timer
- ✔ Engine Cycle Crank



WARNING & SHUTDOWN ALARM

- ✔ Generator Over/Under Voltage & Frequency
- ✔ Crank Disconnect (Failure to Start)
- ✔ Under/Over Speed
- ✔ Over Current
- ✔ Low Oil Pressure
- ✔ High Water Temperature
- ✔ Low Fuel Level
- ✔ Low Water Level



FEATURES

- ✔ User Friendly
- ✔ Compatible With CAN Engines
- ✔ License Free Software
- ✔ Largest Backlit Icon Display In Its Class
- ✔ Fully Configured Via The Fascia Or Pc Using Usb
- ✔ Efficient Power Save Mode

